


DOTS DETAIL (NO SCALE)

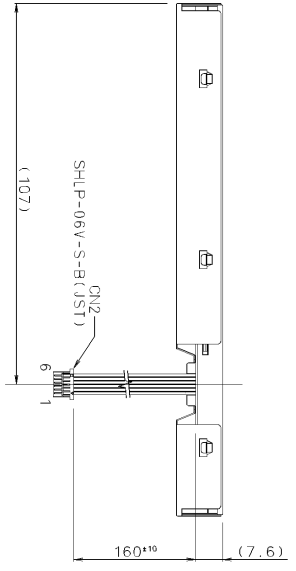

MESSAGE	TOLERANCE		
	A	B	C
16<483	±0.1	±0.3	±1
16<483	±0.2	±0.5	±1.5
230<4300	±0.5	±1.2	±3
230<4300	±0.5	±1.2	±3
500<4	±0.8	±2	±4
ANGLE	±1°	±5°	±10°

PIN ASSIGNMENT

CN1		CN2	
NO.	SYMBOL	NO.	SYMBOL
1	GND	17	G4
2	CK	18	G5
3	H SYNC	19	GND
4	V SYNC	20	B0
5	GND	21	B1
6	R0	22	B2
7	R1	23	B3
8	R2	24	B4
9	R3	25	B5
10	R4	26	GND
11	R5	27	ENAB
12	GND	28	VCC(3.3V)
13	G0	29	VCC(3.3V)
14	G1	30	R/L
15	G2	31	U/D
16	G3	32	NC
		33	GND

NO.	SYMBOL	CABLE COLOR
1	ANODE1	BLACK
2	ANODE2	RED
3	ANODE3	WHITE
4	CATHODE1	BLACK
5	CATHODE2	RED
6	CATHODE3	WHITE

- NOTES
1. THE DIMENSIONS WITH THE MARK (●) ARE CONTROLLED AS A PARTICULAR CHARACTERISTIC.
  2. TOLERANCE WITHOUT INDICATION: ±0.5

DATE	THIRD ANGLE PROJECTION	FINISH	
APPROVED	SCALE UNIT	TITLE	
CHECKED	1:1 JPM	OPTREX CORPORATION	
DRAWN	DATE JAN 07 '10	DWG NO (CODE)	DWG SIZE
	USGN	DWG SIZE	DWG REV
	S. Sano		